


# GP Batteries

## Data Sheet

Model No.: GP397

Description	: Silver Oxide Low Drain Button Cell
Nominal Voltage	: 1.55Volts
Nominal Dimensions	: Ø7.90mm×2.65mm
Application	: Watch (with alarm and lamp), melody card, etc.
Average Weight	: 0.5g
Date Code	: Unless otherwise specified, each cell Will carry a numeric year code and an alphabetical month code.
Shelf Life	: Not less than 90% of the service capacity within first year. , not less than 85% of the service capacity with third year storage at 22 ± 3 °C 40-80 %RH.
Close Circuit Voltage	: 1.25 Volts (min.)(load resistor 200Ω at 22 ± 3 °C for 0.1 to 2 seconds)
Nominal Service Life	: 960hrs (at 50kΩ load) (to 1.2V at 22 ± 3 °C) 160days (at 200kΩ load)
Average Service Capacity	: 30mAh(at 50kΩ load) (to 1.2V at 22 ± 3 °C)


### Typical Discharge characteristics at 22 ± 3°C

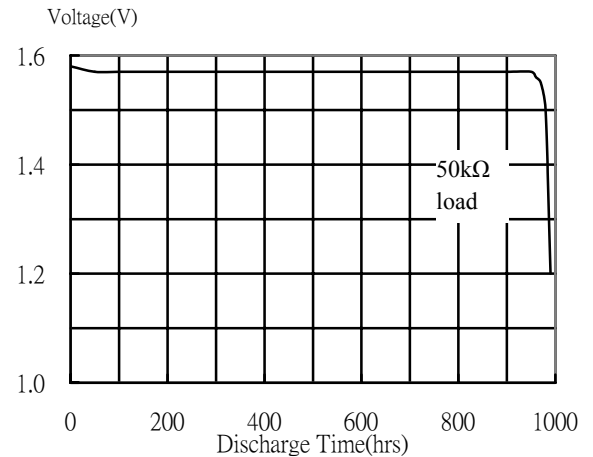

### Cross References:

IEC JIS Eveready Varta Duracell Panasonic Sony

SR59 SR59 397 V397 D397 SP397 SR726SW

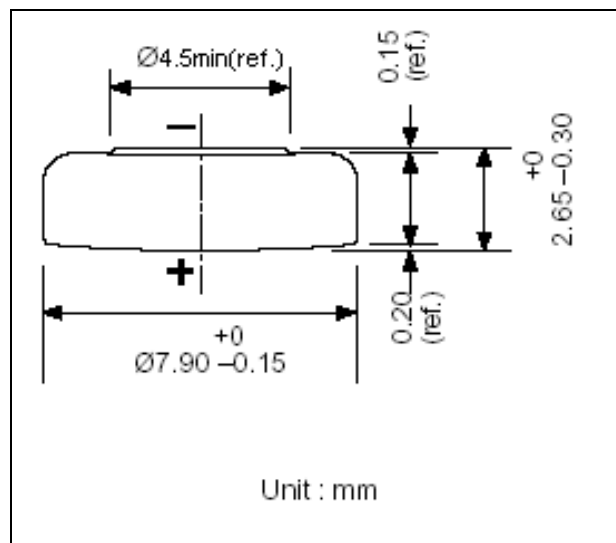

\* The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.

