


GP Batteries

Data Sheet

Model No.: **GPS76E**


Description	: Alkaline Silver High Drain Button Cell
Nominal Voltage	: 1.55Volts
Nominal Dimensions	: Ø11.60mm×5.40mm
Application	: Calculator, hearing aid, lighter electronic toy, camera etc.
Average Weight	: 2.1g
Date Code	: Unless otherwise specified, each cell Will carry a numeric year code and an alphabetical month code.
Shelf Life	: Not less than 90% of the service capacity within first year. , not less than 85% of the service capacity with third year storage at 22 ± 3 °C 40-80 %RH.
Close Circuit Voltage	: 1.30 Volts (min.)(load resistor 100Ω at 22 ± 3 °C for 0.1 to 2 seconds)
Nominal Service Life	: 280hrs (at 3kΩ load) (to 1.2V at 22 ± 3 °C) 190days (at 50kΩ load)
Average Service Capacity	: 130mAh(at 6.2kΩ load) (to 1.0V at 22 ± 3 °C)

Typical Discharge characteristics at 22 ± 3°C

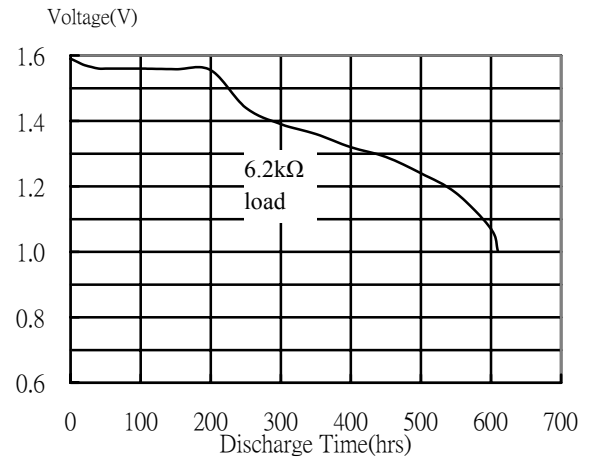

Cross References:

IEC	JIS	Eveready	RAYOVAC	Sony	Duracell	Varta
SR44	SR44	S76E	RS76	SR44SW	MS76	V76PX

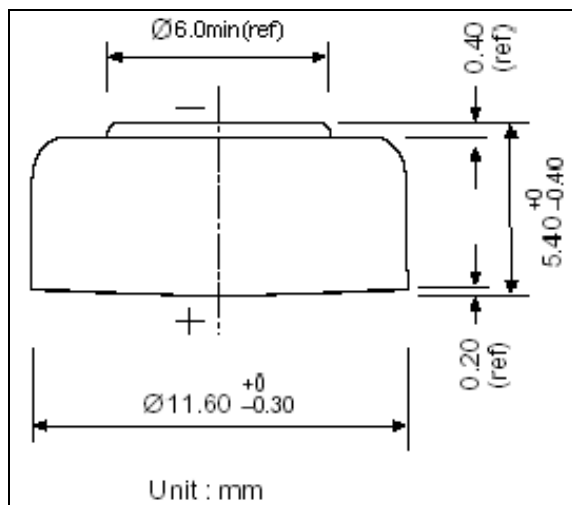

* The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.

