



Model No.: **CR1632**


<b>Description</b>	: Flat Lithium Battery
<b>Chemical System</b>	: Lithium Manganese Dioxide
<b>Nominal Voltage</b>	: 3.0 Volts
<b>Nominal Capacity</b>	: 140mAh
<b>Dimensions</b>	: $\phi 16.0 \times 3.2\text{mm}$
<b>Average Weight</b>	: 1.9 g
<b>Application</b>	: Remote keyless entry, computer memory back up
<b>Operating temperature</b>	: $-10^{\circ}\text{C}$ to $+60^{\circ}\text{C}$

### Dimension Drawing

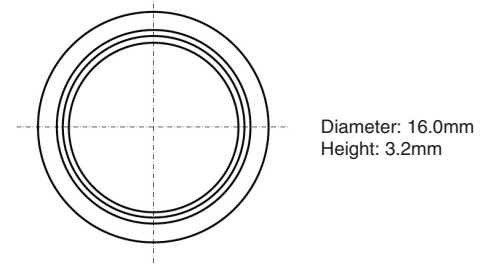


Unit : mm


### Discharge Characteristics on Load

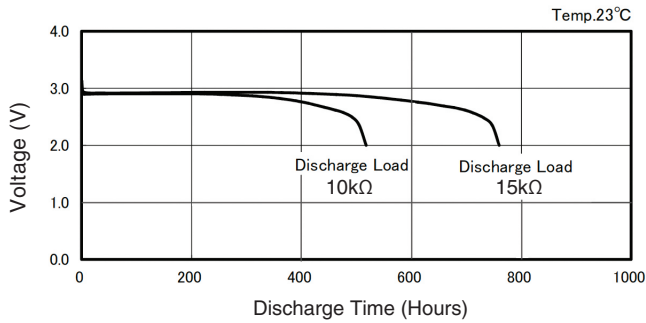



### Discharge Characteristics on Temperature

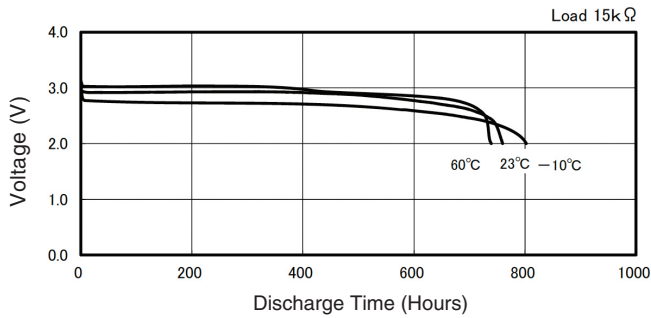

### Discharge Characteristics on Pulse Load (Discharge depth 40%)

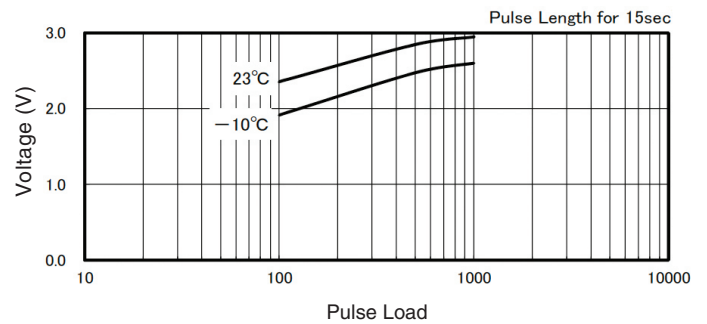

### Discharge Load vs. Discharge Capacity

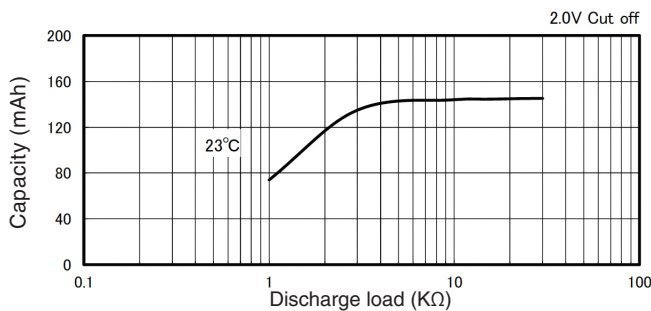

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.