


# GP Batteries

NO MERCURY ADDED	
Description	: Six layers built zinc carbon batteries
Chemical System	: Zinc-Manganese dioxide (Ammonium chloride)
Nominal Voltage	: 9.0 Volts
Nominal Dimensions	: 26.5 mm × 17.5 mm × 48.5 mm
Terminals	: Miniature snap fasteners stud(+)and socket(-)
Jacket	: Printed metal jacket
Applications	: All electronic devices, e.g. toys, clock radio, smoke detector
Effective period	: 24 months
Average Weight	: 36 g

Model No.: GP1604GLF

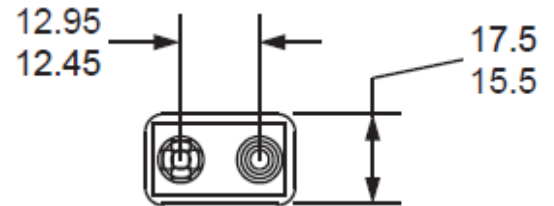


### Cross References:

GP	JIS	IEC
1604GLF	6F22	6F22


### Typical Service Life:

Discharge Resistance	Discharge Condition	End Point Voltage	Service Life
620 Ohms	2 Hrs/Day	5.40 V	30.0 Hrs

620 Ohms 2 Hrs/Day EV = 5.40 V

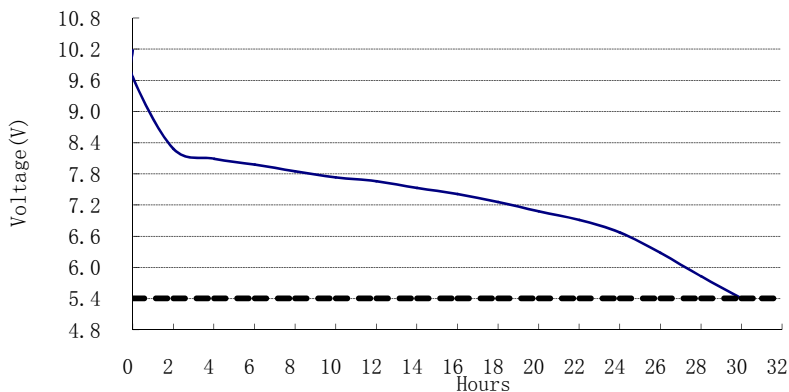

At 20±2°C and 55±20% RH within 30 days of manufacture

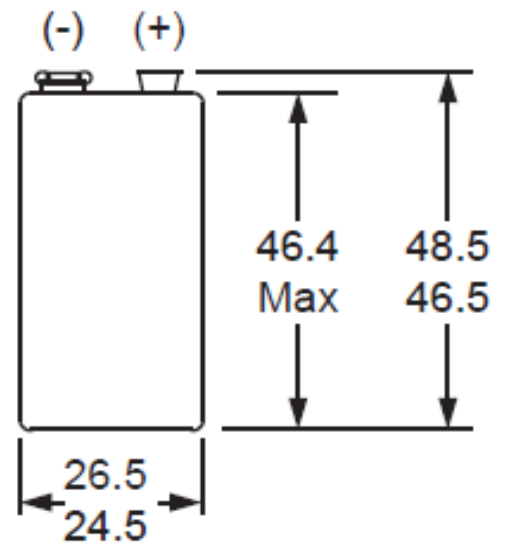

Unit: mm

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors

[www.gpbatteries.com](http://www.gpbatteries.com)

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.

Copyright © GPI International Ltd. - All rights reserved

Member  
Gold Peak Group