



Model No.: GP189

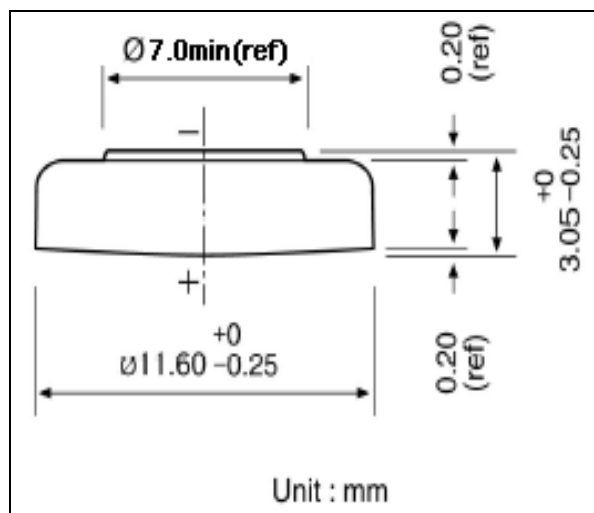

Type	:	Alkaline Low Drain Button Cell			
Chemical System	:	Alkaline Manganese Dioxide			
Nominal Voltage	:	1.5Volts			
Nominal Dimensions	:	Ø11.6mm×3.05mm			
Application	:	Watch (with alarm), calculator, electronic toys, melody card, ... etc.			
Average Weight	:	1.0g			
Date Code	:	Unless otherwise specified, each cell Will carry a numeric year code and an alphabetical month code.			
Shelf Life	:	Not less than 90% of the service capacity within first year. , not less than 85% of the service capacity with third year storage at 20 ±2 °C 45-75%RH			
Close Circuit Voltage	:	1.30Volts (min.)(load resistor 100Ω at 20 ± 2 °C for 0.1 to 2 seconds)			
Nominal Service Life(to 1.0V at 20 ±2 °C)	:	660hrs (at 20 kΩ load) 140 days (at 100 kΩ load)			
Average Service Capacity (to 1.0V at 20 ±2 °C)	:	44mAh(at 15 kΩ load)			
Cross References:					
IEC	JIS	Eveready	Varta	Others	
LR54	LR1130	189	V10GA	LR54	

Typical Discharge characteristics at 20 ± 2 °C

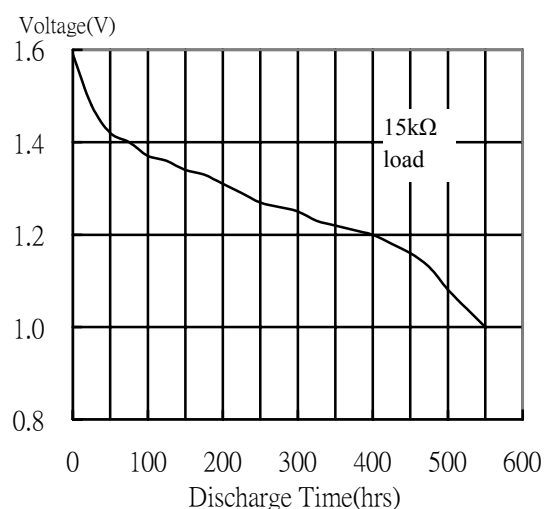

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.