


Description	: Silver Oxide High Drain Button Cell
Nominal Voltage	: 1.55Volts
Nominal Dimensions	: Ø11.60mm×5.40mm
Application	: calculator, hearing aid, lighter, . electronic toys, camera, etc.
Average Weight	: 2.3g
Date Code	: Unless otherwise specified, each cell Will carry a numeric year code and an alphabetical month code.
Shelf Life	: Not less than 90% of the service capacity within first year. , not less than 85% of the service capacity with third year storage at 20 ± 2 °C 45-75 %RH.
Close Circuit Voltage	: 1.30 Volts (min.)(load resistor 100Ω at 20 ± 2 °C for 0.1 to 2 seconds)
Nominal Service Life	: 165hrs (at 1.5kΩ load) (to 1.2V at 20 ± 2 °C) 230days(at 50 kΩ load)
Average Service Capacity	: 165mAh(at 6.2kΩ load) (to 1.2V at 20 ± 2 °C)


### Cross References:

IEC	JIS	Eveready	Panasonic	Sony	Duracell	Varta
SR44	SR44	357	SP357	SR44SW	D357	V357

Model No.: **GP357**

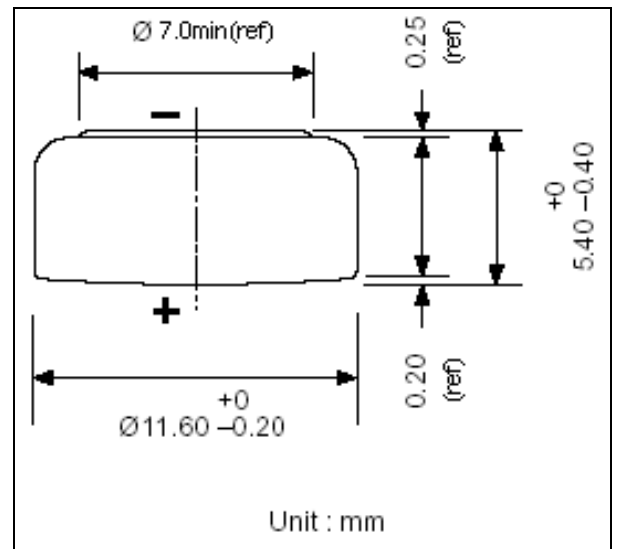

### Typical Discharge characteristics at 20 ± 2 °C

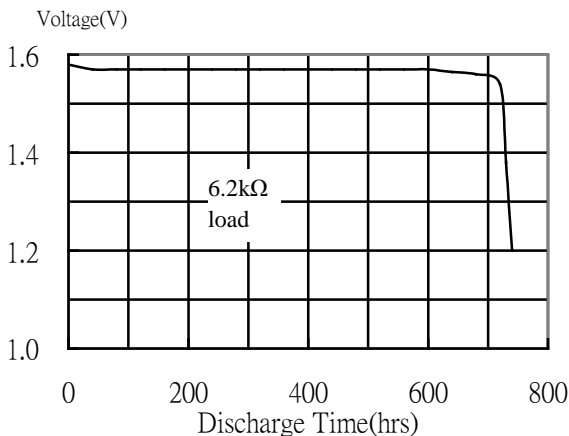

\* The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.