


Description	: Silver Oxide High Drain Button Cell
Nominal Voltage	: 1.55Volts
Nominal Dimensions	: Ø11.60mm×4.20mm
Application	: Watch(with alarm and lamp, hearing aid, calculator, electronic toy etc.
Average Weight	: 1.7g
Date Code	: Unless otherwise specified, each cell Will carry a numeric year code and an alphabetical month code.
Shelf Life	: Not less than 90% of the service capacity within first year. , not less than 85% of the service capacity with third year storage at 20 ± 2 °C 45-75 %RH.
Close Circuit Voltage	: 1.30 Volts (min.)(load resistor 100Ω at 20 ± 2 °C for 0.1 to 2 seconds)
Nominal Service Life	: 800hrs (at 10kΩ load) (to 1.2V at 20 ± 2 °C) 160days (at 50kΩ load)
Average Service Capacity	: 120mAh(at 6.2kΩ load) (to 1.2V at 20 ± 2 °C)

Model No.: **GP386**

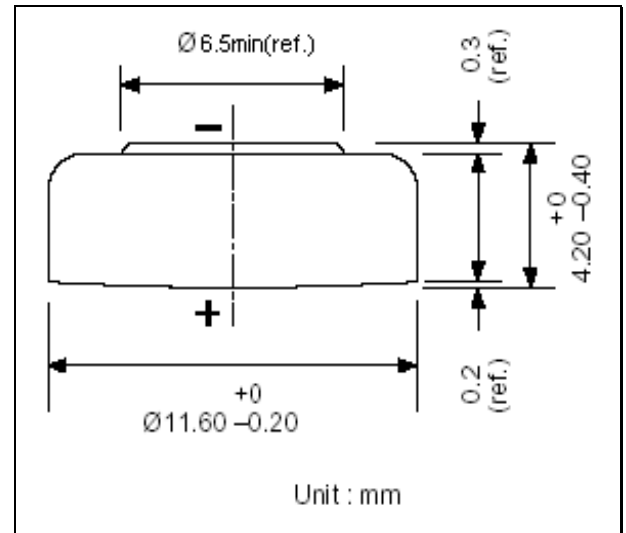


Cross References:

IEC JIS Eveready Varta Duracell Panasonic Sony

SR43 SR43 386 V386 D386 SP386 SR43SW

Typical Discharge characteristics at 20 ± 2°C

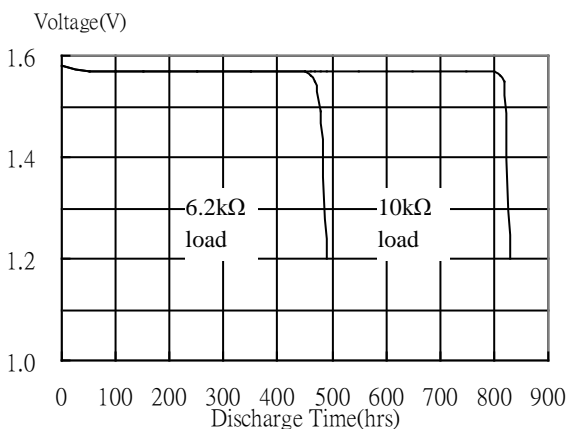

* The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.