

PRODUCT SPECIFICATION

GP Portable PowerBank Model : M20B

Revision History


Revision	Date	Initiator	Reason for Change
0.0	25 Aug 2021	Kevin Chan	Draft Release
0.1	1 Nov 2021	Kevin Chan	Updated weight and IEC
0.2	11 Nov 2021	Kevin Chan	Updated input specs, recharge time and remarks on reverse charging
0.3	20 Jan 2022	Kevin Chan	Updated input rating to 5V/3.0A

Prepared By	Approved By		
Kevin Chan	Kevin Chan		
Date: 25 Aug 2021	Date: 25 Aug 2021		



Product Specification

Model no.: M20B

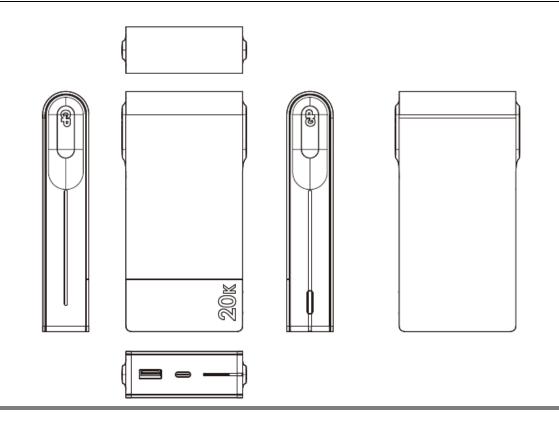

Product Name	:	GP Portable PowerBank M20B
Description	:	M-series v2 20000mAh PD 22.5W PowerBank
Battery Rating	:	Lithium Polymer 3.7V 20000mAh 74Wh
Input	:	[USB-C PD] DC 5V/3.0A, 9V/2.0A, 12V/1.5A (18.0W Max.)
Output	:	[USB-C PD] DC 5V/3.0A, 9V/2.22A, 12V/1.67A (20.0W Max.)
		[USB-A] DC 5V/4.5A, 9V/2.0A, 12V/1.5A (22.5W Max.)
		[USB-C+USB-A] DC 5.0V/3.0A (15W Max.)
Total output	:	22.5W Max.
Application	:	Charge mobile and electronic devices with USB input
Recharging Time	:	6.5 hours by 9V/2A via USB-C port
Operation Temperature	:	5°C to 35°C

Member Gold Peak Group

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.

GP Batteries

Product Specification

Model no.: M20B

Safety protection : 1) Over voltage protection

- 2) Over current protection
- 3) Over charging and discharging protection
- 4) Short circuit protection
- 5) Over temperature protection
- 6) Loop back protection

LED Indication : Charging & Discharging the Portable PowerBank

There are four diffused white LEDs for battery status, \textcircled : LED blinking, \circ : LED off, \bullet : LED on, with ±5% error) There is one blue LED to indicate fast charging.

Item	Scope		Sta	ntus	
Charge	Power Level	LED #1	LED #2	LED #3	LED #4
indication	100%	٠	•	•	•
	75-100%	•	•	•	÷¢
	50-75%	•	•	Ċ.	0
	25-50%	•	\	0	0
	0-25%	X	0	0	0

Press button to show battery status :

Item	Scope		Sta	atus	
Discharge	Power Level	LED #1	LED #2	LED #3	LED #4
and battery	75-100%	٠	•	•	•
level	50-75%	٠	•	•	0
indication	25-50%	٠	•	0	0
	10-25%	٠	0	0	0
	0-10%	\$¢	0	0	0

Dimensions	:	138 (L) x 67 (W) x 27 (H) mm +/-0.5mm
Weight	:	370g +/- 10g (TBC)
Certification	:	CE, FCC, UKCA, RoHS, UN38.3, IEC62133, IEC62368
Bundled cable	:	30cm Essential USB-A to USB-C charging cable

: 12 months from ex-factory date

: PowerBank will shut down automatically when it's depleted. Reverse Remarks

charging will happen if the powerbank is completely empty when connected to a device.



Member Gold Peak Group Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.